

**OFFICE OF THE NANOOR PANCHAYAT SAMITY  
NANOOR ★ BIRBHUM**

TENDER NOTICE: NIT no- 02/NPS/2019-20,

Dated: - 30/12/2019

Sealed tenders are being invited from the bonafied / resourceful contractor/ unemployed engineers co- operative as well as labour co-operative as per current approved base of ARCS, Birbhum/ enlisting contractor of Engineering Department of the Government having experience in same nature of work for the following works, details of which are mentioned below:-

**Details of works:-**

Sl No	Name of the work	Amount put to tender (Rs)	Earnest Money (Rs)	Credentials	Cost of Tender Paper (Rs)	Time of Completion	Remarks
1	Construction of boundary wall of SI Office at BasaPara of Thupsara GP within Nanoor Panchayat Samity under head MPLAD	382093.00	9552.00	229256.00	1200.00	30 days	
2	Construction of boundary wall at Thupsara GP Market of Nanoor Panchayat Samity under head MPLAD	248190.00	6205.00	148914.00	900.00	30days	
	Construction of Protection wall at Kule Natunpukur of Jalundi GP of Nanoor Panchayat Samity under head MPLAD	449477.00	11237.00	269686.00	1500.00	30days	
	Construction of Sansad Meeting shed at Banagram Daspara of Jalundi GP within Nanoor Panchayat Samity under head MPLAD	204177.00	5104.00	122506.00	700.00	60days	

Date & time for dropping tender paper : **10/01/2020 up to 2.00 pm**

Tender paper may be accepted through courier service up to **10/01/2020 up to 2.00 pm**

Venue of dropping tender papers: -

- 1) At the office of Nanoor Panchayat Samity.
- 2) At the office of the Sub-Divisional Officer, Bolpur, Birbhum

Date & Time of opening Technical bid : **10/01/2020 up to 3.00 pm** at the Office of Nanoor Panchayat Samity

Date & time of opening of Financial bid : **10/01/2020 at 3.30 pm** at the Office of Nanoor Panchayat Samity

The tender paper along with schedules is available in the Birbhum District website having the following links:-

[http://birbhum.gov.in/Tenders/tenders\\_new.htm](http://birbhum.gov.in/Tenders/tenders_new.htm) and <http://103.249.37.130/tender>

1. The tender paper consists of two parts. Form-A-Technical Bid, Form-B-Financial Bid. Photocopy of all relevant papers(**Original documents may be submitted on demand at the time of opening of tenders**) mentioned in **check list of Form-A** have to be enclosed with Form-A in a sealed envelope and the Form-B is to be submitted in a separate sealed envelope both Form-A and Form-B and to be submitted in a single sealed envelope and it should be addressed to Executive Officer/B.D.O, Nanoor Panchayat Samity/ Nanoor Dev. Block, Nanoor, Birbhum, Pin-731301, Ph. No- 03463-241342, Fax- 03463-241342, e-mail-bdonanoor@gmail.com
2. All the sealed cover should be superscribe by name, slno of work as well as mentioned the Form A or Form B.

**Terms and Conditions**

- 1) **Time is the essence** of contact. The successful contractor must complete the work within the stipulated time. No extension of time will be allowed except in special cases. If any contractor fails to complete the work within the stipulated time the work order issued in his favour will be cancelled without assigning any reasons. The excess expenditure if any due to such a step will be recovered from the unpaid bill/ security deposits of the tenderers. This is apart from any other penal measure the undersigned may take including blacklisting of contractors and forfeit of earnest money.
- 2) **Earnest money and Cost of Tender Paper noted** against the name of work will have to be deposited in the form of

**ECS MODE( through NEFT/RTGS) in ICICI BANK ( Bolpur Branch)**


**Account No:-089501000922 IFSC Code- ICIC0000895.**

in favour of the undersigned.

The earnest money will be converted in to security money after acceptance. Balance 7.5% security money will be deducted from the Bill. Security money will be released as per norms.

- 3) **The rate should** be quoted in percentage both in figures and words.
- 4) **Incomplete tender will** be summarily rejected. The successful tenderer will have to execute a formal agreement on a NJS of Rs. 10/- before issue of work order.
- 5) **Audit report of last financial year** will have to be submitted in case of Engineers Co- Operative and Labour Co-Operative. Credential of similar type of works will have to be produced in case of Engineers Co- Operative and Labour Co-Operative.
- 6) **All works will** be have to be done according to specification and drawing approved by the authority and as per direction of the S.A.E in charge.
- 7) **No consumable material** will be supplied to the agency for any work from the office of the undersigned. Agency will be responsible for producing all materials required for proper execution of the work in his own cost.
- 8) **Bitumen will be** supplied by the contractor with his own arrangement subject to submission of valid document of I.O.C.
- 9) **For construction of** Black top road power roller of 8-10 ton, hand roller, miller mixture, spot mix plant of 3-5 ton/ hour capacity must be arranged by the contractor on his own cost.
- 10) **All rates shall** be included of all charges, royalty, toll charges, carriage etc.
- 11) **Before starting of** work the worksite must be clean and dressed by cutting all sorts of jungle, shrubs etc. for which no extra payment will be made.
- 12) **Against NIT no:- 02/NPS/2019-20, Dated:- 30.12.2018** each contractor can submit in all serial no of tender document to the office of the undersigned.
- 13) **The successful tenderer** will have to start the work within 07 days from the date of issue of work order after execution of the formal agreement and will have to complete within stipulated time.
- 14) **Acceptance of lowest** tender is not obligatory and the undersigned reserves the right to accept or reject any or all tenders without assigning any reason what so ever and also to split up the tendered work to more than one contractor for the interest of scheme execution.
- 15) **Amalgamation of un- employed** Engineers Co- Operative and Labour Co-Operative in any form should not be allowed towards counting of eligibility in participation of tender.
- 16) **GST/IT/Royalty /Cess** at the prescribed rate will be deducted at source. The notice shall perform part of terms and condition of tender and tenderer shall be bound to abide by them.
- 17) **Before submission of** tender, the contractor must visit the work site to judge the local condition from all corners and no plea/complain about the site will be entertained after wards. It will be assumed that the agency offered the tender rate after reviewing entire position of the work site.
- 18) a) **Separate tender should** be submitted in similar way for each work or group of work.  
b) **Before submitting tender,** the tenderer must get his signature attested on the contract form by witness failing which his tender liable to be rejected.
- 19) **All working tools** and plants and implements required for the work are to be arranged supplied by successful tenderer at his own cost.
- 20) **The successful tenderer** will have to abide by the provision of West Bengal Contract Labour (Regulation and Abolition of Rules 1972) as will be enforced from time to time. If no labour license is obtained and produced by the contractor, payment will be liable to be withheld.
- 21) **If the last date** of submission of tender is declared as holiday the tender will be received on the next day as usual time.
- 22) **Claim for idle** labour from contractor will not be entertained under any circumstances. No claim will be entertained for any increase in railway freight and market price.
- 23) **The tender received** after the due date and time and any change in quotation after opening of the tender will be out rightly rejected. The Office will not be responsible for the loss of tender form or the delay in the postal transit.

**The undersigned reserve the right to accept or reject any or all the tenders or to split up the work between more than one tenders without showing any reason thereof.**

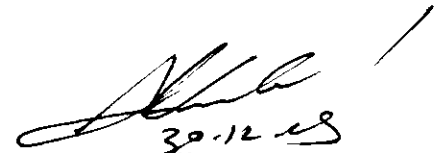
  
30.12.18  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor, Birbhum

**Memo no:- 1110(26)/NPS/19**


**Dated:-30/12/2019**

**Copy forwarded for information and with a request for wide publicity to:-**

- 1) The District Magistrate, Birbhum, Suri.
- 2) The A.E.O, Birbhum Zilla Parishad, P.O:- Suri, Dist, Birbhum
- 3) The Sub- Divisional officer , Bolpur , Dist, Birbhum
- 4) The District Informatics Officer , NIC, Suri, Birbhum. With a request to upload this notice to official Website of Birbhum district ([www.birbhum.gov.in](http://www.birbhum.gov.in))
- 5-8) The Sabhapati / Sahakari Sabhapati / Karmadakshya, P. K.O.P.S.S / Karmadakshya, S.S.O.T.S.S of Nanoor Panchayat Samity
- 9-11) The Junior Engineer, (B.P/ W.R.D.D/RWP)
- 12) The Post Master ,Nanoor, Dist, Birbhum
- 13) A.& H.C , Nanoor Dev. Block
- 14) The Cashier cum Store Keeper ,Nanoor Panchayat Samity
- 15-25) To the Pradhan .....(All).
- 26) Office Notice Board



30.12.19  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor, Birbhum

  
Signature of the Issuing Authority

OFFICE OF THE NANOOR PANCHAYAT SAMITY  
/ BLOCK DEVELOPMENT OFFICER

**TENDER FOR SUPPLY MATERIALS/LOCAL WORKS**  
**From- A( Technical Bid )**

(Approved in the meeting ASUOPSS meeting dated 20.02.2016)

**PRICE**

- |   |  |
|---|--|
| 1. Estimated Cost/Amount of Tender exceeding up to Rs. 1, 00,000/-                  | Rs. 300/-  |
| 2. Estimated Cost/Amount of Tender exceeding Rs.1, 00,000/-& up to Rs. 2, 00,000/-  | Rs.600/-   |
| 3. Estimated Cost/Amount of Tender exceeding Rs. 2, 00,000/-& up to Rs. 3, 00,000/- | Rs. 600/-  |
| 4. Estimated Cost/Amount of Tender exceeding Rs.3, 00,000/- & above                 | Rs 900/- plus proportionate increase of Rs 150/- for every Rs 50,000/- |

- Name of the Supplier/contractor \_\_\_\_\_  
Farm/Concern: \_\_\_\_\_
- Name of work: \_\_\_\_\_
- NIT No: \_\_\_\_\_, SI No: \_\_\_\_\_
- Amount put to Tender: \_\_\_\_\_

**General Rules and Directions**

1. The tender paper consists of two parts. Form-A-Technical Bid, Form -B-financial Bid. All relevant papers mentioned in check list have to be enclosed with Form-A and in a sealed envelope and the Form-B is to be submitted in a separate sealed envelope both Form-A and Form-B and to be submitted in a single sealed envelope and it should be addressed to Executive Officer/B.D.O, Nanoor Panchayat Samity, Nanoor, Birbhum, Pin-731301, Ph. No- 03463-241342, Fax- 03463-241342.
2. The Tender Paper completed in all respect should reach this office within the date & time mentioned in the Notice Inviting Tender. Incomplete and defective tenders would be straight-way rejected.
3. In the event of the Tender being submitted by a farm it must be signed separately by each member thereof or in the event of the absence of any partner, it must be signed on his behalf by a person holding Power of Attorney authorizing him to do so.
4. Photocopy of valid PAN card, P.Tax and VAT registration certificate should be submitted along with the Tender paper. Original certificates have to be produced on demand.
5. Cost of tender paper should be deposited along with tender paper in a separate Bank Draft in favour of Executive Officer/ B.D.O
6. The amount of Earnest money will be 2% or 2.5% of the estimated cost. The Earnest Money should be deposited along with the tender paper in the form of a separate Bank Draft in favour of Executive Officer, Nanoor Panchayat Samity/Block Development Officer ,Nanoor dev. Block , payable at Bolpur/ Nanoor as applicable.
7. @10% of the bill amount shall be deducted from the final bill as Security Money, if necessary, and may be released after the security period of six months of the work is satisfactorily completed.

8. 1.00% Income Tax, 5 % sales tax or 3% VAT shall be deducted from the Final Bill. This rate may vary as per Govt. Order.
9. The accepting authority reserves the right to reject all the Tender without assigning any reason any thereof and it will not be bound to accept either the lowest tender or any of the tenders.

### CONDITIONS OF CONTRACT

The person whose Tender may be accepted shall, before the date fixed for commencing the work make a declaration on Non-Judicial Stamp Paper worth Rs. 10/ that he shall abide by all the conditions of the contract. All damages payable by the contractor under the terms of his contract may be deducted by the Nanoor Panchayat Samity from or paid by sale of a sufficient part of his earnest money / security deposit or from the interest of such Govt. security or from any other sums due or which may become due by the Nanoor Panchayat Samity.

The contractor is to deliver the materials on or before the dates mentioned in the tender, failing which he shall be subject to pay 1% of the total amount of the contract for every day not exceeding ten days that he shall exceed his time, as and for liquidated damages.

In every case in which the payment or allowance mentioned in clause 4 shall have been incurred for ten consecutive days ,the Authority shall have the power either to annul the contract altogether, or to have the supply completed without further notice at the contractors' risk and expense as the Authority may deem best suited to their interest and the contractor shall have no claim to compensation for any loss that he may incur in any way.

If the contractor shall hindered in the supply of the materials so as to necessitate an extension of the time allowed in this tender ,he shall apply in writing to the Executive Officer/ B.D.O, Nanoor Panchayat Samity/ Nanoor Development Block who shall grant it in writing if reasonable grounds been shown for it, and without such written authority, the contractor shall not claim exemption from the time leviable under clause 4.

The contractor shall give notice to the Executive Officer/ B.D.O, Nanoor Panchayat Samity/ Nanoor Development Block /SAE-in charge of the work, about his intention of making delivery of materials and on materials being approved receipt shall be granted to him by the authority and no materials will be considered as delivered until so approved.

On the completion of the delivery of materials, the contractor shall be furnished with a certificate to that effect but the delivery will be not considered complete until the contractor shall have removed all rejected materials (if any) and shall have the approved materials stacked or placed in such position as may be pointed out him.

Payment will made to the extent of nice-tenth the quantity delivered during each month. But all such payments made shall be considered as payments on account to be covered by the final bill for the complete supply.

The materials shall be of the best description and in strict accordance with the specification .The contractor shall receive payment for such materials only as are approved and passed by the SAE-in –charge.

In the event of the materials being considered inferior to that described in the specification the contractor shall, on demand in writing, forthwith remove the same at his own charge and cost, and the event of his neglecting to

do so within such period as may be deemed fit by the Technical Authority, that officer may have such rejected materials removed at the contractor's risk and expense, the expense incurred being liable to be deducted from any sums due or which may become due to the contractor.

If the contractor or his work people break or deface any building/road/fence/enclosure/grass land/cultivated land he shall repair/make good the same at his who expense, and in the event of his refusing or failing to do so the damages shall be repaired at his expense the Executive Officer who shall deduct the cost from any sums due or which may become due to the contractor.

The contractor shall supply at his own expense all tools, Plants, implements required for due fulfillment of his contract, and the materials shall remain at his own risk till the date of final delivery, unless it shall have been in the meantime removed for use by the SAE-in-charge.

The contract shall not be sub-let without prior written permission from the authority concerned. In the event of the contractor sub-letting his contract without such permission, he shall be considered to have thereby committed a breach of contact, and his security deposit shall be forfeited and shall have no claim for any compensation for any loss that may accrue from the material he may have collected or engagement entered into.

The decision of the Tender Committee shall be final, binding and conclusive on all questions.

Supplier / contractor will be fully responsible for guarding the materials till those are fully consumed. No measurement will be taken until 60% supply of work each completed.

-----  
*Signature of Tenderer*

Should this tender be accepted, I/We do hereby agree abide by and fulfill all the terms of the above specification and all the conditions of contracts annexed hereto, or in default to forfeit and pay to the Nanoor Panchayat Samity the penalties or sums money mentioned in the said conditions.

Dated:

Tenderer

Signature of the Witness to the Tenderer: \_\_\_\_\_

Address: \_\_\_\_\_

**(For Office use only)**

Check List:

1. PAN Card: Yes/ No
2. IT return : Yes/ No
3. GST Registration Certificate: Yes/ No
4. Credential Certificate with work order: Yes/ No
5. Bank Draft for Tender Paper Cost: Yes/ No
6. Bank Draft for earnest money: Yes/ No
7. Audit report for last financial year: Yes/ No  
(Applicable for engineers & Labour Co- operative only)
8. Approved current list of ARCS, (Applicable for Engineers & labour Co- operative) only

As per documents submitted by the tender and after verification of the same it has been found that the tender is recommended as technically qualified / disqualified.

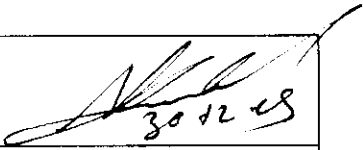
.....  
(Signature of S.A.E)

Signature of Officer & Members of Tender Committee:

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.

Accepted / Rejected

Signature of Executive Officer/ B.D.O



Signature of the Issuing Authority

**OFFICE OF THE NANOOR PANCHAYAT SAMITY  
/BLOCK DEVELOPMENT OFFICER  
TENDER FOR SUPPLY MATERIALS/LOCAL WORKS  
From- B ( Financial Bid )**

Note:- The schedule for the respective work must be enclosed herewith.

❖ Name of Supplier/ Contractor :

---

❖ Firm /concern : \_\_\_\_\_

❖ Name of work : \_\_\_\_\_

NIT No \_\_\_\_\_ SI no \_\_\_\_\_

❖ Amount put to Tender : \_\_\_\_\_

**TENDER FOR WORKS**

I/ We herby tender for the execution for the Nanoor Panchayat Samity of the work specified in the under written memorandum within the time specified in such memorandum at the rates specified there in, and in accordance in all respects with the specification, designs, drawings and instructions in writing and in all other respects in accordance with such conditions so far as

**MEMORANDUM**

i. Name of the Work : \_\_\_\_\_

ii. Amount put Tender : Rs. \_\_\_\_\_

iii. Earnest Money : Rs. \_\_\_\_\_ Vide Draft no. \_\_\_\_\_

iv. Tender Paper cost : Rs. \_\_\_\_\_ Vide Draft no. \_\_\_\_\_

v. Time allowed for the work from date of written order to commence : \_\_\_\_\_

vi. Rate offered on Percentage Basis (both in figure &word) : \_\_\_\_\_

AT PAR the schedule rate.

I) \_\_\_\_\_% less then the schedule rate.

II) \_\_\_\_\_% above then the schedule rate.

\_\_\_\_\_  
Signature of Tenderer

Should this tender be accepted, I/We do hereby agree abide by and fulfill all the terms of the above specification and all the conditions of contracts annexed hereto, or in default to forfeit and pay to the Nanoor Panchayat Samity the penalties or sums money mentioned in the said conditions.

Dated: \_\_\_\_\_ Tenderer

Signature of the Witness to the Tenderer: \_\_\_\_\_

Address: \_\_\_\_\_

Signature of Officer &Members of Tender Committee Present at the time of opening:

- 1.
- 2.
- 3.
- 4.
- 5.
- 6.





**Schedule for SI no -01**

**Schedule for construction of boundary wall of SI Office at BasaPara of Thupsara GP within Nanoor Panchayat Samity under head MPLAD**

SI no	Description of Items	Total Quantity	Unit	Rate (in Rs.)	Amount (in Rs.)
1	Earth work in excavation in foundation trenches or drain in all sorts of soils (including mixed soil) the item includes necessary trimming the side of trenches leveling dressing and ramming the bottom, bailing out water as required complete. Depth of excavation not exceeding 1.5 mt	4.32	cum	Rs.119.27	515.00
2	Filling in foundation or plinth by fine sand in layers not exceeding 1.5mm salutation with water ramming complete including the cost of supply of sand	0.54	cum	Rs.572.55	309.00
3	Ordinary cement concrete with graded stone ballast in GF ( 1:3:6)	0.27	cum	Rs.4,105.50	1108.00
4	Ordinary cement concrete with M20 grade (1:1.5:3) with graded stone chips 20mm down excluding shuttering and reinforcement at ground floor	7.79	cum	Rs.4,976.83	38770.00
5	Hire and labour charges for shuttering with centering and necessary staging upto 4m using approved props of slab beam column lintel curve or straight including fitting fixing and striking out after completion of works with prop with Props	84.28	sqm	Rs.205.00	17277.00
6	Brick work with 1st class bricks in cement mortar (1:6) in Superstructure	24.00	cum	Rs.4,421.04	106105.00
7	Plaster (in wall, floor etc.) with sand and cement mortar including rounding off or chamfering corners as directed and racking out joints or roughening of concrete surface including throating, noising and drip courses where iii) With 1:6 cement mortar 15mm thick	259.45	sqm	Rs.132.54	34388.00
8	Reinforcement for reinforced concrete work in all sorts of structure in/c distribution bars, stirrups, hinders etc. in/c suppl of rods, initial straightening and removal of loose rust (if necessary) cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 6 gauge black annealed wire at every intersection, complete as per drawing and direction.	0.61	MT	Rs.48,310.33	29469.00
9	MS or WI ornamental grill of approved design joints, continuously welded with MS, WI flats and bars for windows railing etc. fitted and fixed with necessary screws and lugs in ground floor. Grill weighing @ 16Kg. /M2	0.64	Qtl	Rs.9,888.00	6926.00
10	Decorative cement based paint three coats to external surface two coats including one coat of cement primer outer wall	259.45	sqm	Rs.49.00	12713.00
11	Supplying ,fitting ,fixing GI chain link Fencing 75X75 mm mesh 12 gauge wire to the RCC or wooden post with Galv hook complete as directed	96.00	sqm	Rs.335.00	32160.00
12	M.S. structural works in columns, beams etc. with simple rolled structural members (e.g. joists, angle, channel sections conforming to IS: 226, IS: 808 & SP (6)- 1964 connected to one another with bracket, gussets, cleats as per design, direction of Engineer-incharge complete including cutting to requisite shape and length, fabrication with necessary bolting, metal arc welding conforming to IS: 816- 1969 & IS: 1995 using electrodes of approved make and brand conforming to IS:814- 2004, haulage, hoisting and erection all complete. The rate includes the cost of rolled steel section, consumables such as electrodes, gas and hire charge of all tools and plants and labour required for the work including all incidental chages such as electricity charges, labour insurance charges etc. I) For structural members of specified sections weighing less than 22.5 Kg/m(50mmX50mmX5mm)	0.15	MT	Rs.72,603.00	10890.00
13	M.S. gate of Jail type as per approved design made of strong M.S.frame work, intermediate stiffeners and round / square bars or angles. M.S. sheet (not less than 14 gauge) gussets, cleats etc. including necessary riveting, bolting, welding, locking and hanging arrangements, fitting and fixing complete as per direction of the Engineer-in -charge.	3.65	qtl	Rs.10,090.00	36829.00
14	Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using approve putty etc. on the surface. On steel surface two coats with any shape except white.	105.28	sqm	Rs. 79.00	8317.00
15	Display Board	1.00	no	Rs.2,000.00	2000.00
<b>Total</b>					<b>337776.00</b>
<b>Add CGST 6%</b>					<b>20267.00</b>
<b>Add SGST 6%</b>					<b>20267.00</b>
<b>Total</b>					<b>378310.00</b>
<b>Add Cess 1%</b>					<b>3783.00</b>
<b>Total</b>					<b>382093.00</b>

(Rupees three lakh eighty two thousand ninety three only )


  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor :: Birbhum


  
Junior Engineer  
Nanoor Panchayat Samity  
Nanoor :: Birbhum

**Schedule for construction of boundary wall at Thupsara GP Market of Nanoor Panchayat Samity under head MPLAD**

Sl no	Description of Items	Total Quantity	Unit	Rate (in Rs.)	Amount (in Rs.)
1	Earth work in excavation in foundation trenches or drain in all sorts of soils (including mixed soil) the item includes necessary trimming the side of trenches leveling dressing and ramming the bottom, bailing out water as required complete. Depth of excavation not exceeding 1.5 mt	11.19	cum	Rs.119.27	1335.00
2	Filling in foundation or plinth by fine sand in layers not exceeding 1.5mm salutation with water ramming complete including the cost of supply of sand	5.17	cum	Rs.572.55	2960.00
3	Single layer brick flat soiling of picked jhama bricks including ramming and dressing bed to proper level and filling joints.	19.75	sqm	Rs.266.00	5254.00
4	Ordinary cement concrete with graded stone ballast in GF ( 1:3:6)	0.75	cum	Rs.4,105.50	3079.00
5	Ordinary cement concrete with M20 grade (1:1.5:3) with graded stone chips 20mm down excluding shuttering and reinforcement at ground floor	8.94	cum	Rs.4,976.83	44493.00
6	Hire and labour charges for shuttering with centering and necessary staging upto 4m using approved props of slab beam column lintel curve or straight including fitting fixing and striking out after completion of works with prop with Props	75.31	sqm	Rs.205.00	15439.00
7	Brick work with 1st class bricks in cement mortar 6:1(ii) in superstructure	61.88	cum	Rs.584.50	36169.00
8	Plaster (in wall, floor etc.) with sand and cement mortar including rounding off or chamfering comers as directed and racking out joints or roughening of concrete surface including throating, noising and drip courses where iii) With 1:6 cement mortar 15mm thick	170.06	sqm	Rs.132.54	22540.00
9	Reinforcement for reinforced concrete work in all sorts of structure in/c distribution bars, stirrups, hinders etc. in/c supple of rods, initial straightening and removal of loose rust (if necessary) cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction. (1% of total M20 concrete i.e. item no.5)	0.70	MT	Rs.48,310.33	33817.00
10	MS or WI ornamental grill of approved design joints, continuously welded with MS, WI flats and bars for windows railing etc. fitted and fixed with necessary screws and lugs in ground floor. Grill weighing @ 16Kg. /M2	0.64	Qtl	Rs.9,888.00	6926.00
11	Decorative cement based paint three coats to external surface two coats including one coat of cement primer outer wall	170.06	sqm	Rs.49.00	8333.00
12	Painting on steel surface	4	sqm	Rs.79.00	316.00
13	Supplying, fitting, fixing GI chain link Fencing 75X75 mm mesh 12 gauge wire to the RCC or wooden post with Galv hook complete as directed	15.00	sqm	Rs.335.00	5025.00
14	M.S. structural works in columns, beams etc. with simple rolled structural members (e.g. joists, angle, channel sections conforming to IS: 226, IS: 808 & SP (8)- 1964 connected to one another with bracket, gussets, cleats as per design, direction of Engineer-incharge complete including cutting to requisite shape and length, fabrication with necessary bolting, metal arc welding conforming to IS: 816- 1969 & IS: 1995 using electrodes of approved make and brand conforming to IS:814- 2004, haulage, hoisting and erection all complete. The rate includes the cost of rolled steel section, consumables such as electrodes, gas and hire charge of all tools and plants and labour required for the work including all incidental chages such as electricity charges, labour insurance charges etc. I) For structural members of specified sections weighing less than 22.5 Kg/m(50mmX50mmX5mm)	0.43	MT	Rs.72,603.00	31219.00
15	Display Board	1.00	no	Rs.2,500.00	2500.00
<b>Total</b>					<b>219405.00</b>
<b>Add CGST 6%</b>					<b>13164.00</b>
<b>Add SGST 6%</b>					<b>13164.00</b>
<b>Total</b>					<b>245733.00</b>
<b>Add Cess 1%</b>					<b>2457.00</b>
<b>Total</b>					<b>248190.00</b>

(Rupees Two lakh forty eight thousand one hundred ninety only )


  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor :: Birbhum


  
Junior Engineer  
Nanoor Panchayat Samity  
Nanoor :: Birbhum

**Schedule for SI no -03****Schedule for construction of Protection wall at Kule Natunpukur of Jalundi GP of Nanoor Panchayat Samity under head MPLAD**

SI no	Description of Items	Total Quantity	Unit	Rate (in Rs.)	Amount (in Rs.)
1	Earth work in excavation for foundation of structure as per drawing and technical space for a tier including fitting out, ramming & spreading or stacking spoils with in a lead of 150mm as directed and including trimming the sods of trenches, leveling, dressing and ramming the bottom complete as per direction of the EIC in all sorts of soil	59.53	cum	114.00	6786.00
2	Sand filling in foundation trenches with good local sand free from earth in layers not exceeding 15cm in/c watering, ramming etc. complete.	7.14	cum	621.74	4439.00
3	Single layer BFS with picked jhama bricks and filling the joints with local land.	47.63	sqm	266.00	12670.00
4	Providing laying Design mix M15 cement concrete without reinforcement in any last of well pier, abutment, wingwall, dropwall with approved stone metal approved type 45mm to 22.4mm size with screening and cleaning of aggregate and same as necessary curing in water with sort of labour & materials but excluding cost of labour & materials for form work & reinforcement.	7.14	cum	4671.13	33352.00
5	Providing and laying cement concrete Design mix M15 with or without reinforcement in any part of bridge, and culverts with graded stone chips, gravels of appropriate nominal size including screening and cleaning of approved course aggregated and sand as necessary curing in water, with not and carriage of all materials, but excluding cost of labour and materials for shuttering and reinforcement.	59.17	cum	4671.13	276391.00
6	Providing weep holes (150 x 75) in abutment or wing wall including packing with brick bats or boundless approved quality as sites at the back site.	42.00	nos	115.00	4830.00
7	Hire and labour charges for side shuttering .....fitting, fixing all complete	160.02	sqm	354.00	56647.00
8	Display board	1	nos	Rs.2,230.00	2230.00
<b>Total</b>					<b>397345.00</b>
Add CGST 6%					23841.00
Add SGST 6%					23841.00
<b>Total</b>					<b>445027.00</b>
Add Cess @1%					4450.00
<b>Grand Total</b>					<b>449477.00</b>

Rupees four lakh forty nine thousand four hundred seventy seven only

  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor : Birbhun


  
Junior Engineer  
Nanoor Development Block  
Nanoor : Birbhun

**Schedule for Construction of Sansad Meeting shed at Banagram Daspara of Jalundi GP within Nanoor Panchayat Samity under head MPLAD**

SI no.	Description of Items	Total Qnt.	Unit	Rate	Amount
1	Earth work in excavation in foundation trenches or drain in all sorts of soils (including mixed soil) the item includes necessary trimming the side of trenches leveling dressing and ramming the bottom, bailing out water as required complete. Depth of excavation not exceeding 1.5 mtr.	5.52	cum	Rs. 119.27	658.00
2	Filling in foundation or plinth by silver sand in layers not exceeding 15cm saturated with water ramming complete including the cost of supply of sand	2.76	cum	Rs. 572.55	1581.00
3	Single layer brick flat soling of picked jhama bricks including ramming and dressing bed to proper level and filling joints.	18.37	sqm	Rs. 266.00	4886.00
4	Cement concrete with graded stone ballast(40mm size excluding shuttering) in ground floor (1:3:6)	1.10	cum	Rs. 4,105.50	4516.00
5	Ordinary cement concrete with M20 grade (1:1.5:3) with graded stone chips 20mm down excluding shuttering and reinforcement at ground floor as per IS 456 2000 Pakur / Chandil variety	6.87	cum	Rs. 4,976.83	34191.00
6	Hire and labour charges for shuttering with centering and necessary staging upto 4m using approved props of slab beam column lintel curve or straight including fitting fixing and striking out after completion of works. i)with out prop	36.59	sqm	Rs. 205.00	7501.00
	ii)with prop	13.20	sqm	Rs. 328.00	4330.00
7	Brick work with 1st class bricks in cement mortar 6:1(i) foundation and plinth	1.49	cum	Rs. 4,198.04	6255.00
8	Brick work with 1st class bricks in cement mortar 6:1(ii) in superstructure	2.7	cum	Rs. 4,421.04	11937.00
9	125mm thick brick work with 1:4 mortar	20.79	sqm	Rs. 584.50	12152.00
11	rounding off or chamfering corners as directed and racking out joints or roughening of concrete surface including throating, noising and drip courses where i) With 4:1 cement mortar 10mm thick	40.31	sqm	Rs. 119.54	4819.00
12	ii) With 6:1 cement mortar 20mm thick	23.58	sqm	Rs. 149.74	3531.00
13	iii) With 1:6 cement mortar 15mm thick	46.66	sqm	Rs. 132.54	6184.00
14	Neat cement punning on plaster surface Ground floor	8.52	sqm	Rs. 32.76	279.00
15	structure in/c distribution bars, stirrups, hinders etc. in/c supple of rods, initial straightening and removal of loose rust (if necessary) cutting to requisite length, hooking and bending to correct shape, placing in proper position and binding with 16 gauge black annealed wire at every intersection, complete as per drawing and direction. In ground floor	0.57	MT	Rs. 48,310.33	27537.00
16	MS or WI ornamental grill of approved design joints, continuously welded with MS, WI flats and bars for windows railing etc. fitted and fixed with necessary screws and lugs in ground floor. Grill weighing @ 16Kg. /M2	1.53	qtl	Rs. 9,888.00	15129.00
18	Supplying, fitting & fixing 1st quality Ceramic tiles in walls and floors to match with the existing work & 4 nos. of key stones (10mm) fixed with araldite at the back of each tile & finishing the joints with white cement mixed with colouring oxide if required to match the colour of tiles including roughening of concrete surface, if necessary or by synthetic adhesive & grout materials etc.(B) Walls / With Sand Cement Mortar (1:3) 15 mm thick & 2 mm thick cement slurry at back side of tiles using cement @ 2.91 Kg/Sq.m & joint filling using white cement slurry @ 0.20kg/Sq.m. (a) Area of each tile upto 0.09 Sq.m (i) Coloured decorative	26.45	sqm	Rs. 730.00	19309.00

Sl no.	Description of Items	Total Qnt.	Unit	Rate	Amount
19	White washing with any shed with strainer as required including cleaning and smoothening the surface thoroughly.	22.13	sqm	Rs. 20.01	443.00
20	Decorative cement base paint to external surface two coats including one coat of cement primer outer wall	58.65	sqm	Rs. 49.00	2874.00
21	Priming one coat on timber, plastered or on steel or other metal surface with synthetic enamel/oil bound primer of approved quality including smoothening surfaces by sand papering etc.	9	sqm	Rs. 29.00	279.00
22	Painting with best quality synthetic enamel paint of approved make and brand including smoothening surface by sand papering etc. including using approve putty etc. on the surface. On steel surface two coats with any shape except white.	9	sqm	Rs. 79.00	711.00
23	GI rain water spout 75mm dia and 600-750mm long supplied fitted and fixed complete with two coats of paint to both exposed portion. discharge valve 10mm etc. 1 No.	4	nos	Rs.142.00	568.00
24	Display board	1	nos	Rs.2,230.00	2230.00
<b>TOTAL</b>					<b>171900.00</b>
<b>Add 5% for electrification</b>					<b>8595.00</b>
					<b>180495.00</b>
Add CGST 6%					10830.00
Add SGST 6%					10830.00
Total					202155.00
Add Cess @1%					2022.00
Grand Total					204177.00

Rupees two lakh four thousand one hundred seventy seven only

  
Executive Officer  
Nanoor Panchayat Samity  
Nanoor: Birbhum

  
Junior Engineer  
Nanoor Development Block  
Nanoor: Birbhum